



LEARN MORE

RANGER-U160²³

The **RANGER-U160²³** adds range and density capabilities to an already unrivaled mapping system. It's unique forward and rear looking field of view was designed to minimize laser shadowing and provide a high level of detail on vertical surfaces. Pulse rates up to 2400 kHz and the ability to be carried by a variety of aircraft make this a highly versatile system that is suitable for mapping at various scales in order to meet your unique project objectives. The **RANGER-U160²³** is ideal for corridor mapping applications such as utility, rail and pipeline inspection.

FEATURES

- Exceptional data density with measurement rates up to 2,000,000/s
- 3 facet polygon mirror with -10° back, 0° nadir, and +10° forward for improved detail on vertical structures and surfaces
- Easily mountable to unmanned platforms (UAVs) and to helicopters, gyrocopters, and other small piloted aircrafts
- 100° lateral field of view for single pass corridor coverage

PLATFORM

* Without Accessories

| | |
|-----------------------|---------------------------|
| DIMENSIONS* | 27.5 x 11.7 x 22.2 cm |
| OPERATING VOLTAGE | 18 - 28 VDC |
| POWER CONSUMPTION* | 75 W typical |
| OPERATING TEMPERATURE | 0° - 40° C / 32° - 104° F |
| WEIGHT* | 3.4 kg / 7.5 lbs |


LiDAR SENSOR

| | |
|--------------------------|-----------------------------------|
| LASER WAVELENGTH | 1550 nm |
| RANGE MINIMUM | 5 m |
| RANGE MAXIMUM | 980 m @ 20% reflectivity, 300 kHz |
| PULSE REPETITION RATE | 300 - 2400 kHz |
| SCAN SPEED | 50 - 400 lines/second |
| MAX RETURN COUNT | 32 |
| BEAM COUNT | 3 |
| BEAM DIVERGENCE | 0.4 mrad |
| HORIZONTAL FIELD OF VIEW | 100° |
| VERTICAL FIELD OF VIEW | 20° @ nadir |
| LASER ACCURACY | 0.01 m (1σ @ 150 m) |
| LASER SAFETY | CLASS 1 |

NAVIGATION SYSTEM

| | |
|-----------------------|---|
| CONSTELLATION SUPPORT | GPS + GLONASS + BEIDOU + GALILEO |
| SUPPORTED ALIGNMENT | Kinematic, Dual-Antenna |
| OPERATION MODES | Real-time, Post-Processed |
| ACCURACY POSITION | 1 cm + 1 ppm GNSS baseline RMS Horizontal |

| | |
|----------------------------------|------------|
| ACCURACY ATTITUDE ⁽⁵⁾ | |
| ROLL, PITCH | 0.002° RMS |
| HEADING | 0.007° RMS |



QUICK SPECS

ABSOLUTE ACCURACY ⁽¹⁾⁽²⁾⁽³⁾

1.5 - 3 cm RMSEz @ 120 m (preliminary)

INTRASWATH PRECISION ⁽¹⁾⁽²⁾⁽⁴⁾

2 cm RMSDz @ 120 m (preliminary)

EXAMPLE ACQUISITIONS:

UAV

- » 120 m AGL, 8 m/s, 100° FOV, 2400 kHz
- » Swath Width = 286 m
- » Avg. Density = 875 points/m²

HELICOPTER


- » 250 m AGL, 60 knots, 100° FOV, 1200 kHz
- » Swath Width = 595 m
- » Avg. Density = 54 points/m²

APPLICATIONS

- UTILITIES MAPPING
- RAILWAY TRACK MAPPING
- CONSTRUCTION SURVEYING
- AGRICULTURE & FORESTRY MONITORING
- OPEN PIT MINING OPERATIONS
- OIL & GAS SURVEYING

(1) Approximate values based on PLS test methods described at <https://docs.phoenixlidar.com/accuracy-standards-and-quantification>.
 (2) Using a 90° downward field of view.
 (3) Expected RMSEz when following the PLS recommended acquisition & processing workflow and ASPRS check point guidelines.
 (4) Flat surfaces with >20% reflectivity at the laser's wavelength.

RANGER-U160²³ DIMENSIONS (mm)

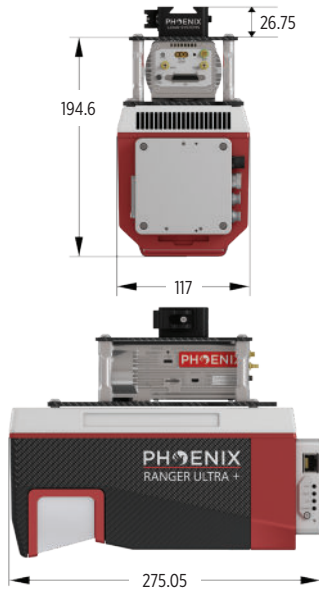

RANGE MEASUREMENT PERFORMANCE

| Laser Pulse Repetition Rate PRR ¹⁾ | 300 kHz | 600 kHz | 1200 kHz | 1800 kHz | 2400 kHz |
|--|--------------------|--------------------|--------------------|--------------------|--------------------|
| Max. Measuring Range ^{2) 3)} natural targets $P \geq 20\%$ natural targets $P \geq 60\%$ natural targets $P \geq 80\%$ | 980 m | 720 m | 520 m | 420 m | 370 m |
| | 1600 m | 1180 m | 860 m | 720 m | 620 m |
| | 1800 m | 1340 m | 980 m | 820 m | 720 m |
| Max. Operating Flight Altitude AGL ^{2) 4)} @ $P \geq 20\%$ @ $P \geq 60\%$ | 560 m (1800 ft) | 400 m (1350 ft) | 290 m (950 ft) | 240 m (800 ft) | 210 m (700 ft) |
| | 900 m (2950 ft) | 670 m (2200 ft) | 490 m (1600 ft) | 400 m (1350 ft) | 350 m (1150 ft) |
| Max. Number of Targets per Pulse ⁵⁾ | 32 | 24 | 11 | 7 | 5 |

1) Rounded average PRR.

2) Typical values for average conditions and average ambient brightness. In bright sunlight, the max. range is shorter than under an overcast sky.

3) The maximum range is specified for flat targets with size in excess of the laser beam diameter, perpendicular angle of incidence, and for atmospheric visibility of 23 km. Range ambiguities have to be resolved by multiple-time-around processing.


4) Considering max. effective FOV 100°, additional roll angle ≤ 5 deg.

5) If the laser beam hits, in part, more than one target, the laser's pulse power is split accordingly. Thus the achievable range is reduced.


Source: RIEGL Laser Measurement Systems

MAX MEASUREMENT RANGE & POINT SPACING DENSITY RANGER-U160²³

PRR = 600 kHz

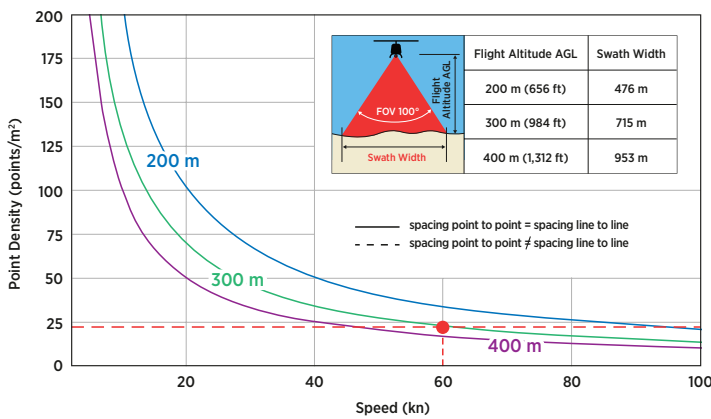

PRR = 2400 kHz

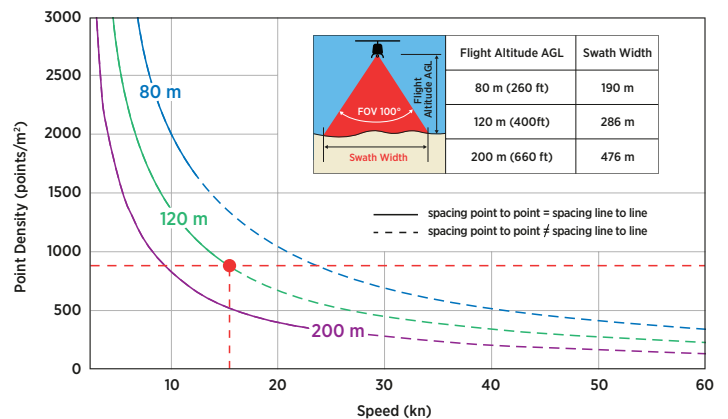

EXAMPLE RANGER-U160²³ at 600 kHz, 100° Field of view, Flying height AGL = 300 m, Flying speed = 60 knots (31 m/s) RESULTING POINT DENSITY **23 pts/m²**

EXAMPLE RANGER-U160²³ at 2400 kHz, 100° Field of view, Flying height AGL = 120 m, Flying speed = 16 knots (8 m/s) RESULTING POINT DENSITY **875 pts/m²**

RANGER-U160²³ ACCESSORIES



6MP A7R4-Lite



Helicopter Mount with Phase One iXM-100 or iXM-RS-100/150F



Cessna Pod



EXPLORE A PHOENIX LiDAR SYSTEM FOR YOUR TEAM, CONTACT US!

PhoenixLiDAR.com • sales@phoenixlidar.com • USA +1.323.577.3366