



LEARN MORE

SCOUT-M2X+

The **SCOUT-M2X+** is the ideal combination of performance, flexibility and affordability. It brings a new level of precision and accuracy to the long trusted SCOUT lineup of multi-channel mapping scanners.

Long range, high pulse rate and triple return capability allow for UAV acquisitions of more data faster through vegetation. Dense survey data can be collected by nearly any method; UAV, Mobile, Backpack, and more. The **SCOUT-M2X+** is also SLAM capable, taking you where others cannot.

FEATURES

- Fast and accurate measurements with a 640 kHz pulse rate scanner
- Live control and feedback during acquisition, including Phoenix's signature real-time point cloud
- SLAM (Simultaneous localization and mapping) capable
- Optional high resolution camera options up to 61 MP



UAV



VEHICLE



BACKPACK



SLAM

QUICK SPECS

ABSOLUTE ACCURACY

2 - 4 cm RMSEz @ 100 m AGL^{(1) (2) (4)}

INTRASWATH PRECISION

4 cm RMSDz @ 100 m AGL^{(1) (2) (3)}

EXAMPLE ACQUISITIONS:

UAV

- » 100 m AGL, 6 m/s, 90° FOV, 640 kHz
- » Swath Width = 200 m
- » Avg. Density = 130 points/m²
- » Collection Rate = 4.32 km²/hr

PLATFORM

*Without Accessories

OVERALL DIMENSIONS*	18.7 x 12.3 x 14.9 cm
OPERATING VOLTAGE	12-28 VDC
OPERATING TEMPERATURE	0° - 40° C / 32° - 104° F
POWER CONSUMPTION*	-30 W
WEIGHT*	1.9 kg

LiDAR SENSOR

LASER PROPERTIES	905 nm Class 1 (eye safe)
RANGE MAX	300 m (80 m @ 10% for all channels)
RANGE MIN	0.5 m
NUMBER OF LASERS	32
PULSE RATE	640 kHz
LINE RATE	10 Hz
VERTICAL FIELD OF VIEW	40.3° (-20.8° to +19.5°)
VERTICAL RESOLUTION	1.3°
HORIZONTAL FIELD OF VIEW	360°
MAX RETURN COUNT	3
LASER BEAM FOOTPRINT H X V	19 cm x 22 cm @ 80 m, 24 cm x 27 cm @ 100 m, 28 cm x 33 cm @ 120 m

NAVIGATION SYSTEM

CONSTELLATION SUPPORT	GPS + GLONASS + BEIDOU + GALILEO
SUPPORT ALIGNMENT	Kinematic, Dual-Antenna
POSITION ACCURACY	1 cm + 1 ppm RMS horizontal
ACCURACY ATTITUDE ⁽⁵⁾	
ROLL, PITCH	0.003° RMS
HEADING	0.011° RMS

APPLICATIONS



CONSTRUCTION SITE SURVEYING



AGRICULTURE & FORESTRY MONITORING



OPEN PIT MINING OPERATIONS



ASSET INVENTORY MAPPING



GENERAL MAPPING

(1) Approximate values based on PLS test condition.


(2) Using a 90° downward field of view.

(3) Range of elevation values on flat surfaces with >20% reflectivity at the laser's wavelength.


(4) Expected RMSEz when following the PLS recommended acquisition & processing workflow and ASPRS check point guidelines.

(5) Estimated post processed accuracy with IMU-27.


SCOUT-M2X+ DIMENSIONS (mm)

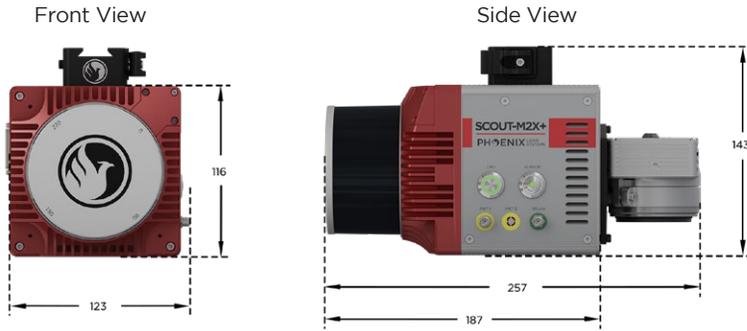

SCOUT-M2X+ POINT DENSITY

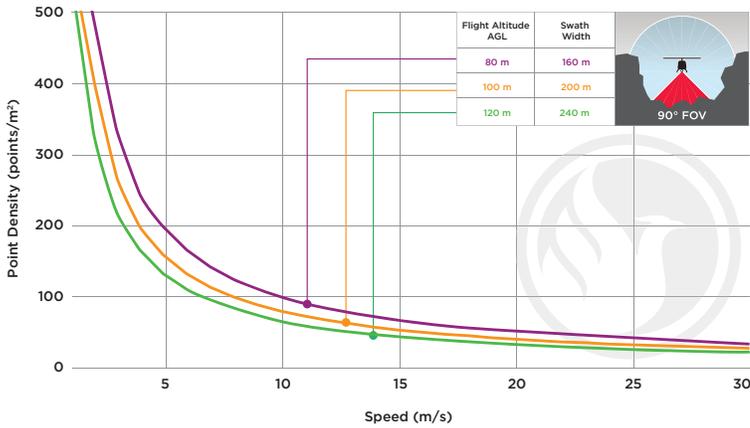

CHANNEL VERTICAL DISTRIBUTION

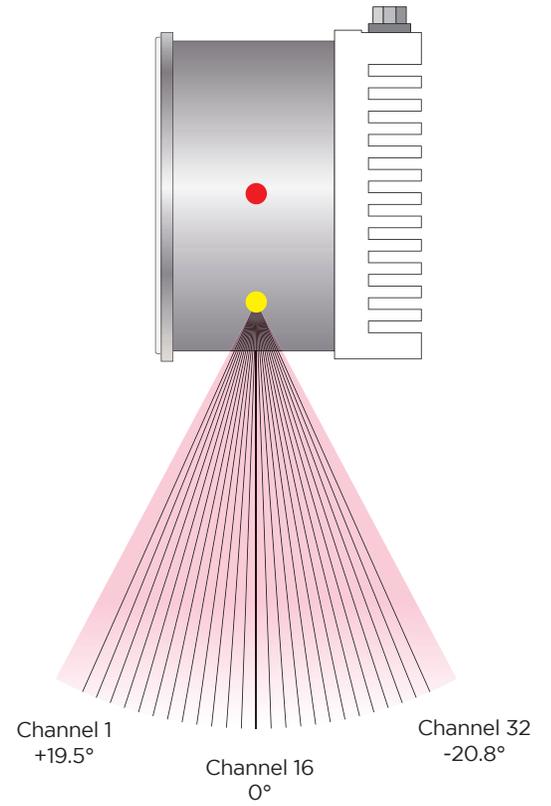

The vertical resolution is 1.3° across the field of view.

SCOUT-M2X+ OPTIONS & MOUNTS



SLAM



Roof Rack



Backpack

SCOUT-M2X+ CAMERA OPTIONS



A6k-Lite (24 MP)



Sony ILX-LR1 (61 MP)



R6 (61 MP)



EXPLORE A PHOENIX LiDAR SYSTEM FOR YOUR TEAM, CONTACT US!

PhoenixLiDAR.com • sales@phoenixlidar.com • USA +1.323.577.3366